


PA Miniature Sized, Low Impedance,
High Reliability For Switching Power Supplies
series




- Lower impedance than PW series.
- Smaller case size and high ripple current.
- Adapted to the RoHS directive (2002/95/EC).

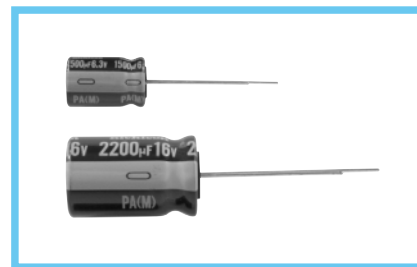

Specifications

Item	Performance Characteristics						
Category Temperature Range	-55 to +105°C						
Rated Voltage Range	6.3 to 35V						
Rated Capacitance Range	180 to 10000μF						
Capacitance Tolerance	±20% at 120Hz, 20°C						
Leakage Current	After 1 minute's application of rated voltage, leakage current is not more than 0.03CV or 4 (μA), whichever is greater.						
tan δ	Rated voltage (V)	6.3	10	16	25	35	120Hz 20°C
	tan δ (MAX.)	0.22	0.19	0.16	0.14	0.12	
For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF.							
Stability at Low Temperature	Rated voltage (V)	6.3	10	16	25	35	120Hz
	Impedance ratio ZT / Z20 (MAX.) Z-55°C / Z+20°C	3	3	3	3	3	
Endurance	After an application of D.C. bias voltage plus the rated ripple current for 5000 hours (3000 hours for D = 8, 4000 hours for D = 10) at 105°C the peak voltage shall not exceed the rated D.C. voltage, capacitors meet the characteristic requirements listed below.						
	Capacitance change	Within ± 20% of initial value (6.3V, 10V : ±30%)					
	tan δ	200% or less of initial specified value (6.3V, 10V : 300%)					
	Leakage current	Initial specified value or less					
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours, and after performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they will meet the specified value for endurance characteristics listed above.						
Marking	Printed with white color letter on dark brown sleeve.						


Radial Lead Type

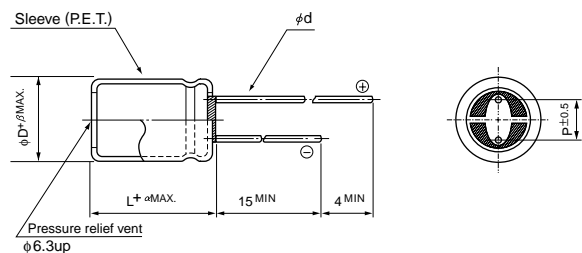

α		(mm)				
α	(L < 20)	1.5				
	(L ≥ 20)	2.0				
φD	8	10	12.5	16	18	
P	3.5	5.0	5.0	7.5	7.5	
φd	0.6	0.6	*0.6	0.8	0.8	
β	0.5	0.5	0.5	0.5	0.5	

※ : In case L > 25 for the φ12.5 dia. unit, lead dia. φd = 0.8mm.

Type numbering system (Example : 10V 470μF)

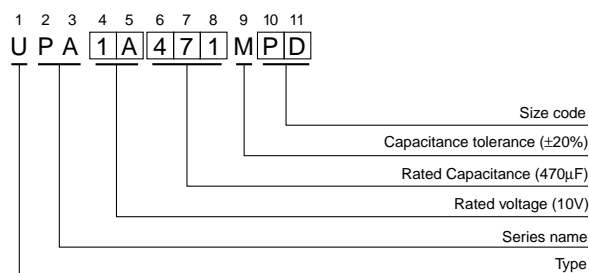

※ Configuration

φD	Pb-free leadwire Pb-free PET sleeve
8-10	PD
12.5 to 18	HD

Frequency coefficient of rated ripple current

Cap. (μF)	Frequency				
	50Hz	120Hz	300Hz	1kHz	10kHz or more
180 to 330	0.55	0.65	0.75	0.85	1.00
390 to 1000	0.70	0.75	0.80	0.90	1.00
1200 to 10000	0.80	0.85	0.90	0.95	1.00

- Please refer to page 20 about the end seal configuration.

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

- Dimension table in next page.

Standard ratings

V (Code)		6.3 (0J)				10 (1A)				16 (1C)			
Cap. (μF)	Item Code	Case size φD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mArms) 105°C / 100kHz	Case size φD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mArms) 105°C / 100kHz	Case size φD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mArms) 105°C / 100kHz
			20°C / 100kHz	-10°C / 100kHz			20°C / 100kHz	-10°C / 100kHz			20°C / 100kHz	-10°C / 100kHz	
330	331									8 × 11.5	0.09	0.18	630
390	391									8 × 11.5	0.09	0.18	630
470	471					8 × 11.5	0.09	0.18	630	10 × 12.5	0.063	0.126	900
560	561	8 × 11.5	0.09	0.18	630	8 × 11.5	0.09	0.18	630				
680	681	8 × 11.5	0.09	0.18	630					8 × 15	0.062	0.124	860
										▲10 × 12.5	0.063	0.126	900
820	821					8 × 15	0.062	0.124	860	8 × 20	0.044	0.088	1220
						▲10 × 12.5	0.063	0.126	900	▲10 × 16	0.049	0.098	1240
1000	102	8 × 15	0.062	0.124	860	8 × 20	0.044	0.088	1220	10 × 16	0.049	0.098	1240
		▲10 × 12.5	0.063	0.126	900	▲10 × 12.5	0.063	0.126	900	●10 × 20	0.035	0.07	1490
						●10 × 16	0.049	0.098	1240				
1200	122	10 × 12.5	0.063	0.126	900	8 × 20	0.044	0.088	1220	10 × 20	0.035	0.07	1490
		●10 × 16	0.049	0.098	1240	▲10 × 16	0.049	0.098	1240				
1500	152	8 × 20	0.044	0.088	1220	10 × 20	0.035	0.07	1490	10 × 25	0.033	0.066	1680
		▲10 × 16	0.049	0.098	1240								
		●10 × 20	0.035	0.07	1490								
1800	182					10 × 20	0.035	0.07	1490				
						▲10 × 25	0.033	0.066	1680				
2200	222	10 × 20	0.035	0.07	1490	10 × 25	0.033	0.066	1680	12.5 × 20	0.029	0.058	1890
		●10 × 25	0.033	0.066	1680	●12.5 × 20	0.029	0.058	1890	●12.5 × 25	0.022	0.044	2280
2700	272	10 × 25	0.033	0.066	1680	12.5 × 20	0.029	0.058	1890	12.5 × 25	0.022	0.044	2280
3300	332	12.5 × 20	0.029	0.058	1890	12.5 × 25	0.022	0.044	2280	▲16 × 20	0.026	0.052	2330
3900	392	12.5 × 25	0.022	0.044	2280	12.5 × 25	0.022	0.044	2280	12.5 × 35.5	0.016	0.032	2940
4700	472	12.5 × 25	0.022	0.044	2280	12.5 × 31.5	0.018	0.036	2720	16 × 25	0.019	0.038	2760
						▲16 × 20	0.026	0.052	2330	▲18 × 20	0.025	0.05	2640
5600	562	12.5 × 31.5	0.018	0.036	2720	12.5 × 35.5	0.016	0.032	2940	16 × 31.5	0.017	0.035	2810
		▲16 × 20	0.026	0.052	2330					▲18 × 25	0.018	0.036	2850
6800	682	12.5 × 35.5	0.016	0.032	2940	16 × 25	0.019	0.038	2760	18 × 25	0.018	0.036	2850
8200	822	16 × 25	0.019	0.038	2760	16 × 31.5	0.017	0.034	2810				
		▲18 × 20	0.025	0.05	2640	▲18 × 25	0.018	0.036	2850				
10000	103	16 × 31.5	0.017	0.034	2810								
		▲18 × 25	0.018	0.036	2850								

V (Code)		25 (1E)				35 (1V)			
Cap. (μF)	Item Code	Case size φD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mArms) 105°C / 100kHz	Case size φD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mArms) 105°C / 100kHz
			20°C / 100kHz	-10°C / 100kHz			20°C / 100kHz	-10°C / 100kHz	
180	181					8 × 11.5	0.09	0.18	630
270	271	8 × 11.5	0.09	0.18	630	8 × 15	0.062	0.124	860
						▲10 × 12.5	0.063	0.126	900
330	331	8 × 11.5	0.09	0.18	630				
390	391	8 × 15	0.062	0.124	860	8 × 20	0.044	0.088	1220
						▲10 × 16	0.049	0.098	1240
470	471	8 × 15	0.062	0.124	860				
		▲10 × 12.5	0.063	0.126	900				
560	561	8 × 20	0.044	0.088	1220	10 × 20	0.035	0.07	1490
		▲10 × 16	0.049	0.098	1240				
680	681	10 × 16	0.049	0.098	1240	10 × 25	0.033	0.066	1680
820	821	10 × 20	0.035	0.07	1490	12.5 × 20	0.029	0.058	1890
1000	102	10 × 25	0.033	0.066	1680	12.5 × 20	0.029	0.058	1890
		●12.5 × 20	0.029	0.058	1890				
1200	122	12.5 × 20	0.029	0.058	1890	12.5 × 25	0.022	0.044	2280
1500	152					12.5 × 31.5	0.018	0.036	2720
						▲16 × 20	0.026	0.052	2330
1800	182	12.5 × 25	0.022	0.044	2280	12.5 × 35.5	0.016	0.032	2940
						▲16 × 20	0.026	0.052	2330
2200	222	12.5 × 31.5	0.018	0.036	2720	16 × 25	0.019	0.038	2760
		▲16 × 20	0.026	0.052	2330	▲18 × 20	0.025	0.05	2640
2700	272	12.5 × 35.5	0.016	0.032	2940	16 × 31.5	0.017	0.035	2810
						▲18 × 25	0.018	0.036	2850
3300	332	16 × 25	0.019	0.038	2760	18 × 31.5	0.016	0.032	2910
		▲18 × 20	0.025	0.05	2640				
4700	472	18 × 25	0.018	0.036	2850				

▲ : In this case, [6] will be put at 12th digit of type numbering system.

● : In this case, [3] will be put at 12th digit of type numbering system.